


Load Class up to C250
EN-1433 Standard

EUROSELF200



ULMA Linear Drainage Channel type EUROSELF200: External width 200 mm; Internal width 150 mm and overall height 70 mm to collect rainwater in 1 metre long units. Locking system consists of 2 screws per metre.

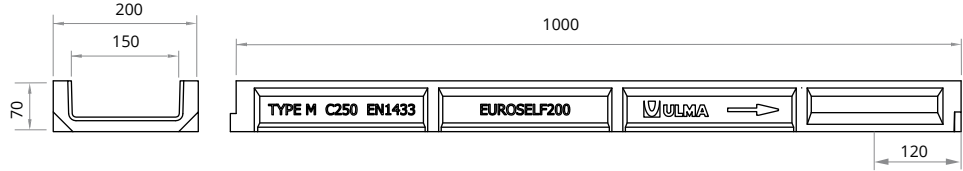


CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
EUROSELF200	1000	70	200	150	160	-	75	81	12,0	1,9

* Vertical outlets on order


GRATINGS

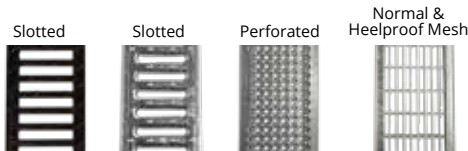

Material	Design	Load	Code	L mm	Width mm	Thickness mm	Opening mm	Weight Kg	Intake area cm²/ml
DUCTILE IRON	SLOTTED	B125	FNX150UCBM	500	200	6	13,75	4,0	683
	SLOTTED	C250	FNX150UCCM	500	200	5	13,75	4,4	683
GALVANISED STEEL	SLOTTED*	A15	GN150UCA	1000	200	3	8	3,4	392
	PERFORATED	A15	GP150UCA	1000	200	3	Ø5	4,2	196
	MESH*	B125	GEX150UCB33	1000	200	2	30 x 30	5,0	1254
	HEELPROOF MESH	B125	GEHX150UCB	1000	200	2	30 x 10	6,2	1116
STAINLESS STEEL	PERFORATED	A15	IP150UCA	1000	200	3	Ø5	4,4	196

* Available in stainless steel, consult design

HOW TO FIX



Code	Units ml
TEF850	2
TEF850	2
(1) TNPC860	2
TNPC860	2
TEF850	2
TEF850	2
TXNPC850	2

(1) Click. Without screws.

CLOSED END CAP

Code
TEUROSELF200C