


Load Class
up to C250
EN-1433 Standard

SELF200



ULMA Linear Drainage Channel type SELF200: External width 204 mm; Internal width 150 mm and overall height 140 mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS150 and screws.

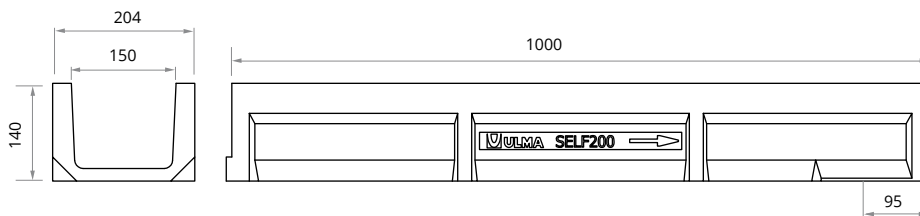


CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
SELF200	1000	140	204	150	160	-	180	54	16,2	7,6

* Vertical outlets on order


GRATINGS

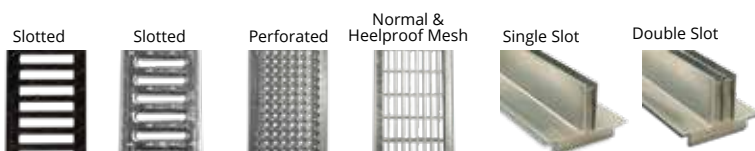

Material	Design	Load	Code	L mm	Width mm	Thickness mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	B125	FNX150UCBM	500	200	6	13,75	4,0	683
	SLOTTED	C250	FNX150UCCM	500	200	5	13,75	4,4	683
GALVANISED STEEL	SLOTTED*	A15	GN150UCA	1000	200	3	8	3,4	392
	PERFORATED	A15	GP150UCA	1000	200	3	Ø5	4,2	196
	MESH*	B125	GEX150UCB33	1000	200	2	30 x 30	5,0	1254
	HEELPROOF MESH	B125	GEHX150UCB	1000	200	2	30 x 10	6,2	1116
	SLOT*	C250	GR150UOC	1000	200	70	15	6,2	150
	DOUBLE SLOT*	C250	GDR150UOC	1000	200	70	2 x 12	7,0	240
STAINLESS STEEL	PERFORATED	A15	IP150UCA	1000	200	3	Ø5	4,4	196

* Available in stainless steel, consult design

HOW TO FIX



Code	Units ml
TEF850 + CS150	2 + 2
TEF850 + CS150	2 + 2
(1) TNPC860 + CS150	2 + 2
TNPC860 + CS150	2 + 2
TEF850 + CS150	2 + 2
TEF850 + CS150	2 + 2
(1)	(1)
(1)	(1)
TXNPC850 + CS150INOX	2 + 2

(1) Click. Without screws.

SUMP UNITS

Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg
ASELF200	500	378	204	160/200	160	1	27,7

BUCKET

Code
CSELF200

OPEN END CAP

Code	Ø mm
TSELF200A	110

CLOSED END CAP

Code
TSELF200C