



Load Class
up to C250
EN-1433 Standard

SELF250

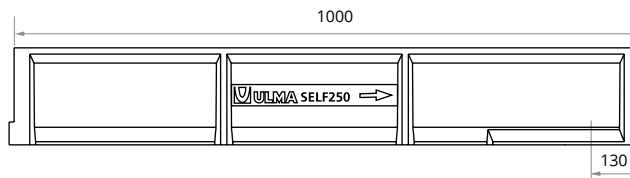

ULMA Linear Drainage Channel type SELF250: External width 260 mm; Internal width 200 mm and overall height 155 mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS200 and screws.



CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
SELF250	1000	155	260	200	200	-	260	35	22,5	12,6

* Vertical outlets on order

GRATINGS




Material	Design	Load	Code	L mm	Width mm	Thickness mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	C250	FNX200UCCM	500	250	6	10	6,7	610
GALVANISED STEEL	SLOTTED*	A15	GN200UCA	1000	250	4	8,5	5,2	418
	MESH*	B125	GEX200UCB33	1000	250	2,5	30 x 30	8,0	1634
	HEELPROOF MESH *	B125	GEHX200UCB	1000	250	2,5	30 x 10	9,5	1453
	SLOT*	C250	GR200UOC	1000	250	70	15	7,9	150
	DOUBLE SLOT*	C250	GDR200UOC	1000	250	70	2x12	10,0	240

* Available in stainless steel, consult design

HOW TO FIX

Locking bar and 2 screws




Code	Units ml
TEF1060 + CS200	2 + 2
TNPC1070 + CS200	2 + 2
TEF1060 + CS200	2 + 2
TEF1060 + CS200	2 + 2
(1)	(1)
(1)	(1)

(1) Click. Without screws.

OPEN END CAP

Code	Ø mm
TSELF250A	160



CLOSED END CAP

Code
TSELF250C

