


Load Class  
up to C250  
EN-1433 Standard

# SELF300

ULMA Linear Drainage Channel type SELF300: External width 300 mm; Internal width 250 mm and overall height 190 mm to collect rainwater in 1 metre long units. Locking system consists of locking bar CS250 and screws.

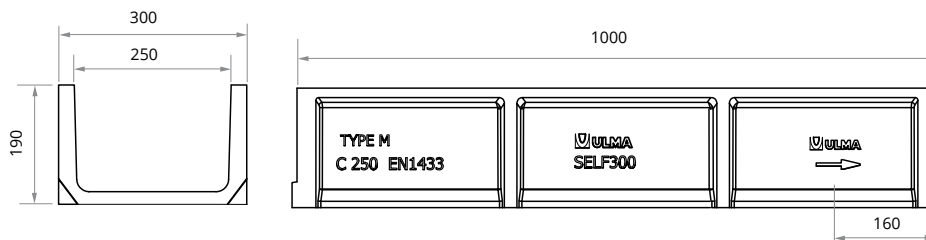

## CHANNEL

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm <sup>2</sup>	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
SELF300	1000	190	300	250	200	-	407	35	26,1	22,5

\* Vertical outlets on order

## GRATINGS

Slotted



Mesh




Material	Design	Load	Code	L mm	Width mm	Thickness mm	Opening mm	Weight Kg	Intake area cm <sup>2</sup> /ml	HOW TO FIX	
										Code	Units ml
DUCTILE IRON	SLOTTED	B125	FNX250UCBM	500	300	6	13,2	8,4	1049	TEF1070 + CS250	2 + 2
	SLOTTED	C250	FNX250UCCM	500	300	6	14	10,5	1004	TEF1070 + CS250	2 + 2
GALVANISED STEEL	MESH*	B125	GEX250UCB	1000	300	3	30 x 20	12,3	1993	TEF1070 + CS250	2 + 2

\* Available in stainless steel, consult design

## HOW TO FIX

Locking bar and 2 screws



## SUMP UNITS

Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg	BUCKET	
								Code**	Weight Kg
AU250	500	375	310	160/200	-	1	36,5	C250	62,7
AU250S + A250B	500	725*	310	160/200	-	2			

\* The sump unit can be higher incorporating an intermediate unit.

## BUCKET



\*\* Only applicable if 2 sump units are installed.

## OPEN END CAP

Code	Ø mm	Image
TSELF300A	160	

## CLOSED END CAP

Code	Image
TSELF300C	