
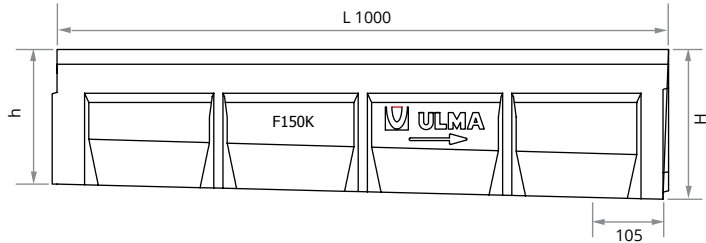


Load Class
up to **F900**
EN-1433 Standard

F150K

SLOPE
2,5% **CE**

ULMA Linear Drainage Channel type F150K: External width 206 mm; Internal width 150 mm; Available with overall heights between 145 mm and 370 mm. Suitable for 2,5% presloped, cascaded or mixed slope, to collect rainwater, in 1 metre long units. Safe locking system consists of eight bolts per LM; Integrated galvanised steel* edges for lateral protection.



* Also available with cast iron edges.

CHANNELS

Code Channel	L mm	H mm		Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
		h	H	Z	X	Vert.	Hor.				
F150K01M	500	145	145	212	150	-	-	120	-	14,1	-
F150K02	1000	145	170	206	150	-	-	155	-	28,3	-
F150K03	1000	170	195	206	150	-	-	190	-	30,4	-
F150K04	1000	195	220	206	150	-	-	230	-	32,5	-
F150K00R	1000	220	220	206	160	160	-	230	45	29,4	11,59
F150K05	1000	220	245	206	150	-	-	265	-	34,6	-
F150K06	1000	245	270	206	150	-	-	305	-	36,7	-
F150K10R	1000	270	270	206	150	160	-	305	36	33,4	17,83
F150K07	1000	270	295	206	150	-	-	340	-	38,8	-
F150K08	1000	295	320	206	150	-	-	375	-	40,8	-
F150K20R	1000	320	320	206	150	160	160	375	27	41,5	24,96
F150K09	1000	320	345	206	150	-	-	410	-	42,9	-
F150K10	1000	345	370	206	150	-	-	457	-	45,0	-
F150K30R	1000	370	370	206	150	160	-	457	27	43,9	33,26


* Vert. and horiz. outlets on order .

GRATINGS




Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	D400	FNX150FTDM	500	195	13,75	6,2	672
	HEELPROOF SLOTTED	D400	FNHX150FTDM	500	195	8	6,3	364
	SLOTTED	E600	FNX150FTEM	500	195	19	7,0	672
	SLOTTED	F900	FNX150FTFM	500	195	19	7,3	723
	HEELPROOF SLOTTED	F900	FNHX150FTFM	500	195	8	8,5	364
	CLOSED	F900	FC150FTFM	500	195	-	12,2	-
DUCTILE IRON STAINLESS	SLOTTED	D400	FIN150FTDM	500	195	25	8,9	566

HOW TO FIX



Code	Units ml
TF1023 + TP	8 + 8
TF1023 + TP	8 + 8
TF1023 + TP	8 + 8
TF1023 + TP	8 + 8
TF1023 + TP	8 + 8
TF1023 + TP	8 + 8
TFX1020	8

CONTINUOUS PRESLOPED OF 2,5%

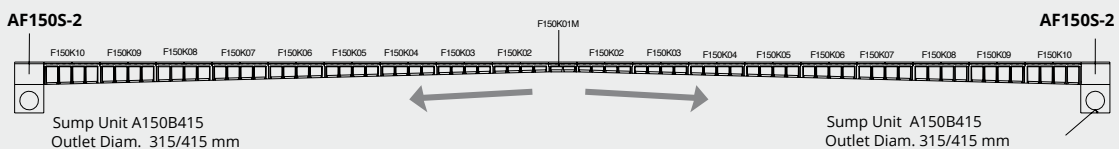


FIRST POLYMER CONCRETE CHANNEL WITH PRESLOPED OF 2,5% ON THE MARKET

- High hydraulic capacity.
- Self-cleaning effect.
- Minimum maintenance.

F150K

SUMP UNITS

	Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg
AF150	AF150-2	500	402	206	160/200	-	1	33,3
AF150S+A150B	AF150S-2 + A150B415	500	918**	206	315/415	-	2	73,2
	AF150 *	500	350	206	160	110	1	24,9
	AF150S + A150B **	500	655**	206	160	110	2	46,9

*Available up to 320 mm height.

**The sump unit can be higher incorporating an intermediate unit.


BUCKET

	Code**
	-
	C150
	-
	C150

** Only applicable if 2 sump units are installed.


OPEN END CAP

Channel	Code	Ø mm
F150K00R	T150K00A	160
F150K10R	T150K10A	160
F150K20R	T150K20A	160
F150K30R	T150K30A	160



CLOSED END CAP

Code
T150K00C
T150K10C
T150K20C
T150K30C



STEP UNITS

Code	
CE150	

To install in the changes of height with cascaded slope.

SLOPE DESIGNS

