



Load Class
up to F900
EN-1433 Standard

F400K

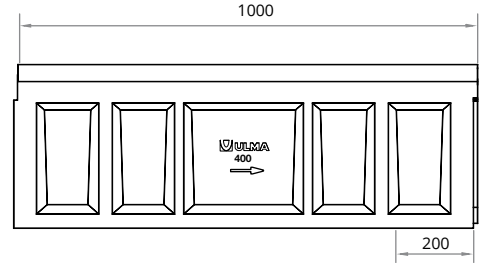

ULMA Linear Drainage Channel type F400K: External width between 462 mm and 494 mm; Internal width 400 mm; Available with overall heights between 400 mm and 700 mm to collect rainwater in 1 metre long units. Safe locking system consists of eight bolts per LM; Integrated galvanised steel edges for lateral protection.




CHANNELS

Code Channel	L mm	H mm	Width mm		Ø Outlet* mm		Hydraul. Section cm ²	Pcs. pallet	Weight Kg	Qref l/s
			Ext.	Int.	Vert.	Hor.				
F400K00R	1000	400	462	400	315	-	1337	6	85,6	100,03
F400K40R	1000	700	494	400	315	-	2490	4	129,1	280,50

*Vert. outlets on order.

GRATINGS

Slotted



Material	Design	Load	Code	L mm	Width mm	Opening mm	Weight Kg	Intake area cm ² /ml
DUCTILE IRON	SLOTTED	D400	FNX400FTDM	500	451	18,5	25,8	1604
	SLOTTED	F900	FNX400FTFM	500	451	18,5	30,3	1615

HOW TO FIX

8 screws per metre



Code	Units ml
TF1023 + TP	8 + 8
TF1023 + TP	8 + 8

SUMP UNITS

Code	L mm	H mm	Width mm	Lateral outlets Ø mm	Front outlet Ø mm	Sump units	Weight Kg
AF400	500	585	462	315	-	1	80,0
AF400S+ A400B*	500	1115	462	315	-	2	167,6
F400K40RS + A400B	1000	1285	494	315	-	2	211,1

*The sump unit can be higher incorporating an intermediate unit.


BUCKET

Code**
C400

** Only applicable if 2 sump units are installed.

OPEN END CAP

Channel	Code	Ø mm
F400K00R	T400K00A	315
F400K40R	T400K40A	315



CLOSED END CAP

Code
T400K00C
T400K40C

