

**Load Class
up to F900**
EN-1433 Standard


KOMPAQ200

CIVIL



Linear Drainage Channel model **ULMA KompaqDrain® Civil KVF200**, with an integral grating, presented in one-piece and manufactured by high resistant Polymer Concrete. Vandal – proof and corrosion resistant. Load class up to F-900 for high loads. With “V” optimized shaped and capture holes with MAX-FLOW® geometry: self-cleaning effect at a low flow, increase at maximum flow and positive opening in order to avoid dirt blockage, for areas without slope. Active surface for cutting of water sheet and for its driving to uptake holes and with non-slippery protuberances. Male and female horizontal and vertical alignment and perimeter preformed groove to facilitate joint sealing in 360°.

The access unit and the sump unit include cast iron grating **FNX200FTFM**, lateral preforms for horizontal outlets on each side and lateral preforms for connections in T, L and in cross.

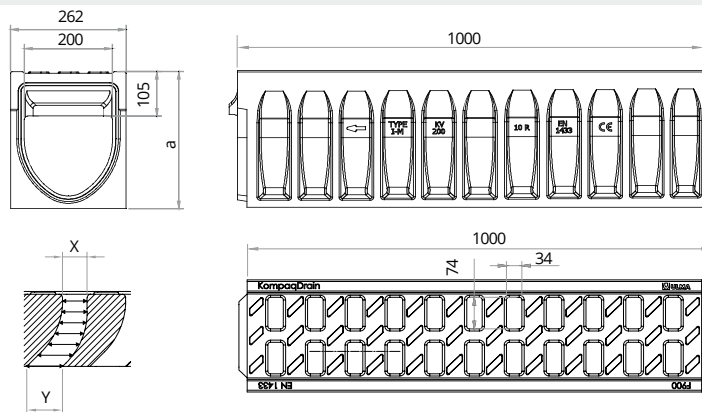

CHANNELS

Channel code	L mm	Height mm	Channel width mm		Weight Kg	Hydraul. Section cm ²	Pcs. x pallet	Intake area cm ² /ml
			External	Internal				
KVF200.10R	1000	325	262	200	88	318	12	577
KVF200.30R	1000	525	262	200	111	718	8	577
KVF200.50R	1000	725	262	200	141	1118	8	577

ACCESS UNIT

Channel code	L mm	Height mm	Channel width mm		Lateral Outlet mm	Vertical Outlet mm	T and + channel connection	Weight Kg	Hydraul. Section cm ²	Pcs. x pallet	Intake area cm ² /ml	
			Ext.	Int.								
AKVF200MF10R	1000	325	262	200	160	160	160	Yes	90	318	12	670
AKVF200MF30R	1000	525	262	200	315	315	200	Yes	115	718	8	670
AKVF200MF50R	1000	725	262	200	400	400	200	Yes	145	1118	8	670

* Standard cast iron edges, galvanised and stainless steel edges available.



SUMP UNITS

Sump Unit Code	L mm	Height mm	Width mm		Frontal Outlet mm	Lateral Outlet mm	Weight Kg	Hydraul. Section cm ²	Pcs. x pallet	Galva. steel bucket	Intake area cm ² /ml	
			Ext.	Int.								
AKVF200MF10RS	1000	325	262	200	-	160	160	84	318	12	-	670
AKVF200MF30RS	1000	525	262	200	-	315	315	108	718	8	-	670
AKVF200MF50RS	1000	725	262	200	-	400	400	138	1118	8	-	670
AKVF200I	500	380	262	200	200	200	315	34	-	16	CKV200	-
AKVF200B	500	380	262	200	200	200	315	38	-	16	CKV200	-

** The Sump unit can be higher incorporating an intermediate unit of 380 mm. AKVF200I.

*** More info about sump units and registers on page 152



END CAPS



Channel	Code	Ø mm
KVF200.10R	TKVF200.10RC	-
	TKVF200.10RAJ	160
KVF200.30R	TKVF200.30RC	-
	TKVF200.30RAJ	200
KVF200.50R	TKVF200.50RC	-

CONNECTORS



Channel	Code
KVF200.10R	TCKVF200.10RFFA
	TCKVF200.10RMMA
KVF200.30R	TCKVF200.30RFFA
	TCKVF200.30RMMA
KVF200.50R	TCKVF200.50RFFA
	TCKVF200.50RMMA

BUCKET



Code
CKV200

STEP UNIT



Code
CEKV200

To install in the changes of height with cascaded slope.

SLOPE DESIGNS

