


Load Class
up to **D400**
EN-1433 Standard

KOMPAQ200 TRAFFIC CE

Linear Drainage Channel model **ULMA KompaqDrain® Traffic KVFD200**, with an integral grating, presented in one-piece and manufactured by high resistant Polymer Concrete. Vandal – proof and corrosion resistant. Load class up to D-400, for all type of vehicles crossing. With “V” optimized shaped and capture holes with **MAX-FLOW®** geometry: self-cleaning effect at a low flow, increase at maximum flow and positive opening in order to avoid dirt blockage, for areas without slope. Active surface for cutting of water sheet and for its driving to uptake holes and with non-slippery protuberances. Male and female horizontal and vertical alignment and perimeter preformed groove to facilitate joint sealing in 360°.

The access unit and the sump unit include: cast iron grating **FNX200FTDM**, lateral preforms for horizontal outlets on each side and lateral preforms for connections in T, L and in cross.

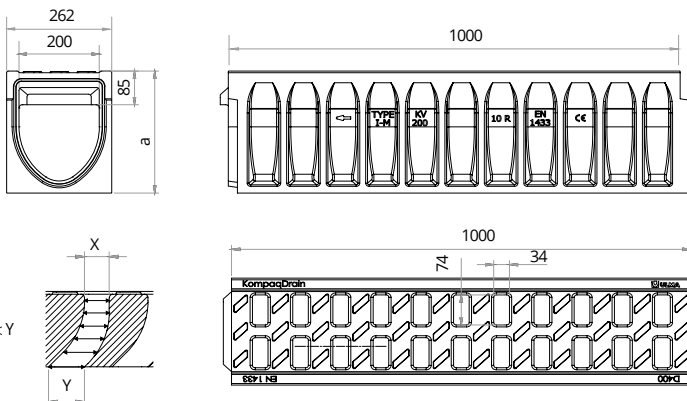

CHANNELS

Channel code	L mm	Height mm	Channel width mm		Weight Kg	Hydraul. Section cm ²	Pcs. x pallet	Intake area cm ² /ml
			External	Internal				
KVFD200.10R	1000	305	262	200	78	318	12	577
KVFD200.30R	1000	505	262	200	101	718	8	577
KVFD200.50R	1000	705	262	200	131	1118	8	577

ACCESS UNIT

Channel code	L mm	Height mm	Channel width mm		Lateral Outlet mm	Vertical Outlet mm	T and + channel connection	Weight Kg	Hydraul. Section cm ²	Pcs. x pallet	Intake area cm ² /ml
			Ext.	Int.							
AKVFD200MF10R	1000	305	262	200	160 160	160	Yes	80	318	12	486
AKVFD200MF30R	1000	505	262	200	315 315	200	Yes	104	718	8	486
AKVFD200MF50R	1000	705	262	200	400 400	200	Yes	135	1118	8	486

* Standard cast iron edges, galvanised and stainless steel edges available.



SUMP UNITS

Sump Unit Code	L mm	Height mm	Width mm		Frontal Outlet mm	Lateral Outlet mm	Weight Kg	Hydraul. Section cm ²	Pcs. x pallet	Galva. steel bucket	Intake area cm ² /ml
			Ext.	Int.							
AKVFD200MF10RS	1000	305	262	200	-	160 160	74	318	12	-	486
AKVFD200MF30RS	1000	505	262	200	-	315 315	98	718	8	-	486
AKVFD200MF50RS	1000	705	262	200	-	400 400	128	1118	8	-	486
AKVF200I	500	380	262	200	200	200 315	34	-	16	CKV200	-
AKVF200B	500	380	262	200	200	200 315	38	-	16	CKV200	-

** The Sump unit can be higher incorporating an intermediate unit of 380 mm. AKVF200I.

*** More info about sump units and registers on page 152



END CAPS



RC



RAJ



FFA



MMA

Channel	Code	Ø mm
KVFD200.10R	TKVFD200.10RC	-
	TKVFD200.10RAJ	160
KVFD200.30R	TKVFD200.30RC	-
	TKVFD200.30RAJ	200
KVFD200.50R	TKVFD200.50RC	-

CONNECTORS



Channel	Code
KVFD200.10R	TCKVFD200.10RFFA
	TCKVFD200.10RMMA
KVFD200.30R	TCKVFD200.30RFFA
	TCKVFD200.30RMMA
KVFD200.50R	TCKVFD200.50RFFA
	TCKVFD200.50RMMA

BUCKET



Code
CKV200

STEP UNIT



Code
CEKV200

To install in the changes of height with cascaded slope.

SLOPE DESIGNS

